



# Collamat® 8600

The professional system. With the external control unit, called Monitor, you get more freedom for your production. The user-friendly menu structure combined with program storage allows you to do product changes in best time and reliability. Build-in monitoring functions make the control and optimisation of the labelling process very comfortable. Application speed of up to 50m/min and working widths of up to 160 mm open a wide range of applications. The Collamat® 8600 is your choice if you are looking for a labeller giving you flexibility, high performance, best accuracy and Swiss quality.

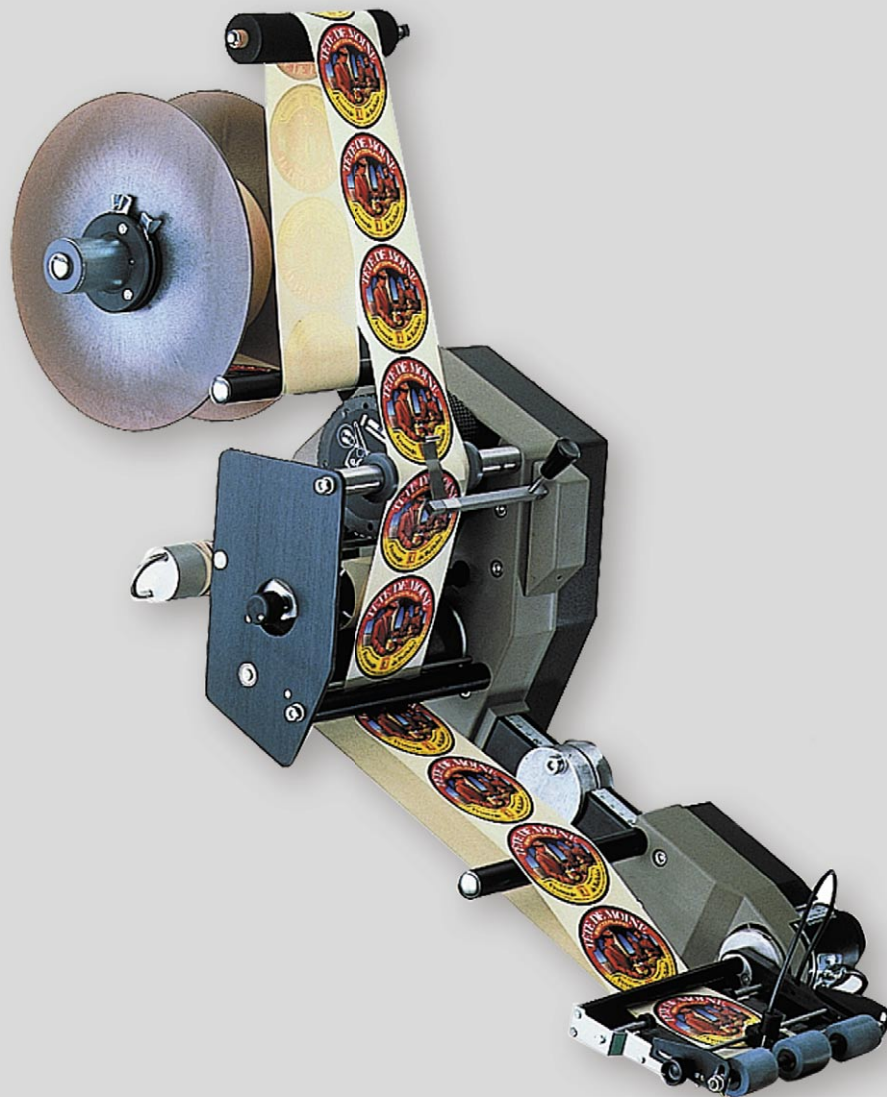

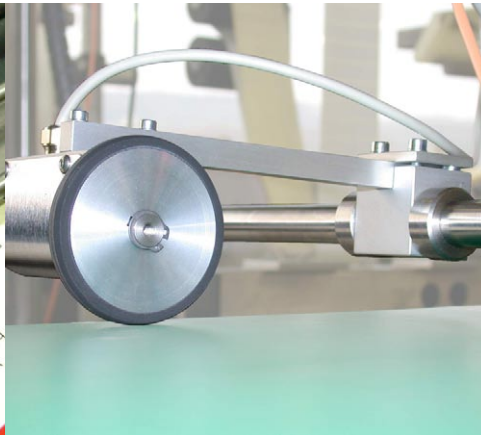

## FEATURES

- Independence – With the help of encoder speed adaptation and the non-stop configuration the system offers you highest possible availability with minimal manpower
- Speed synchronisation – Automatic continuous adjustment to the actual line speed by encoder input
- Zero down time – Two units operating in the non-stop mode guarantees you continuous production
- User-friendly – With the intuitive menu structure the operating of the labeller is no difficulty
- Memory – The capability to store 32 programs enables quick and reliable product change-over
- Swiss accuracy – Not just speed is what you get but also best accuracy over the whole speed range
- Monitoring – Current application data and error messages can be observed by the operator on the monitor's display

## TECHNICAL DATA

	8610	8620
Passing width of label web:	99 mm (3,74 in)	160 mm (6,3 in)
Dispensing speed:	50 m/min (164 ft/min)	40 m/min (131 ft/min)
Labelling accuracy:	± 0.4 mm(1/60 in)	± 0.6 mm(1/40 in)
Label reel:	Max outer diameter 350 mm (13,8 in)	
Drive:	3 phase-stepping motor	
Control unit:	Micro-processor control unit, SMD-technology, non stop labelling, 32 label programs, service functions	
Power supply:	110-240 V / 50-60 Hz / 310 VA	
Approbation:	CE/EMC	

All data are indicative and may be subject to alteration

HM Collamat AG  
Pfeffingerring 201  
CH-4147 Aesch

Phone: +41 (0)61 756 28 28  
Fax: +41 (0)61 756 29 29  
Web: [www.collamat.ch](http://www.collamat.ch)  
E-mail: [contact@collamat.ch](mailto:contact@collamat.ch)

Member of HM Group